

06

FV6320211	FV6320212	Small
FV6320311	FV6320312	Medium
FV6320411	FV6320412	Large
FV6320511	FV6320512	XLarge




SPECIFICATIONS

Frame	SGX 61 hybrid frame
Color	Pearled Black (1) & Aluminum Leafing (2)
Available Sizes	s-m-l-xl
Weight	11.8 kg / 25.9 lb
Fork	Devinci Aluminum
Rear Shock	-
Headset	TH Industries No.848
Rear Derailleur	Shimano Alivio M410
Front Derailleur	Shimano Nexave T401
Crankset	Truvativ Isoflow power spline 48/38/28T
Chainguide	-
Shifters	Shimano EF35
Cassette	Shimano HG50 8s 11-30T
Chain	Shimano IG31
Bottom Bracket	Truvativ power spline
Pedals	VP steel cage
Front Hub	Ritchey
Rear Hub	Ritchey
Rims	Alex ACE18
Spokes	Stainless
Wheels	-
Tires	Kenda Kwest 700Cx35C
Brakes	Promax TX-122
Brake Levers	Shimano EF35
Stem	Globe
Handlebar	Alloy riserbar 20mm
Grips / Tape	Kraton
Saddle	Devinci double density
Seat Post	Globe micro adjust 27.2mm
Seat Collar	Devinci bolt

Notes

DEVINCI

➤ SGX 61 HYBRID FRAME

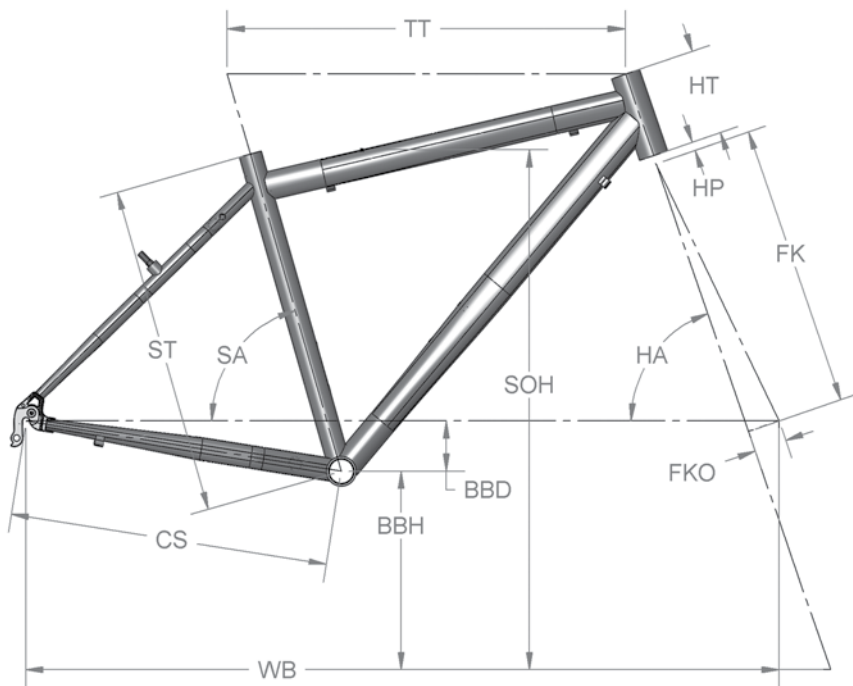

FRAME TECHNICAL SPECIFICATIONS

Seat post diameter	27.2 mm
Seat collar diameter	31.8 mm
Headset diameter	1 1/8"
Headset type	Conventional
Fork type	Rigid
Brake type	"V-Brake"
Front derailleur diameter	31.8 mm
Front derailleur cable route	Bottom
Front derailleur type	Top-swing
Bottom bracket shell width	68 mm
Freehub width	135 mm
Shock length	NA
Shock travel	NA
Shock pivot width top	NA
Shock pivot width bottom	NA
Shock bolt diameter	NA
Rear wheel travel	NA
Tire maximum clearance	700 - 35
Rear derailleur hanger type	MFD205
Rear rack eyelet	Dropout - Seatstay
Fender eyelet	Yes
Weight	1.60 kg / 3.52 lb

FRAME GEOMETRY

	ST		SA	HA	TT		CS		WB		BBH		SOH		HT		BBD		FK		FKO		HP	
	cm	in	deg	deg	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
S	41,0	16,1	75,0	70,5	540,0	21,3	445,0	17,5	1050,0	41,3	277,0	10,9	695,0	27,4	120,0	4,7	70,0	2,8	395,0	15,6	45,0	1,8	12,0	0,5
M	46,0	18,1	74,0	71,0	555,0	21,9	445,0	17,5	1050,0	41,3	277,0	10,9	727,0	28,6	120,0	4,7	70,0	2,8	395,0	15,6	45,0	1,8	12,0	0,5
L	51,0	20,1	73,5	71,0	565,0	22,2	445,0	17,5	1056,0	41,6	277,0	10,9	767,0	30,2	150,0	5,9	70,0	2,8	395,0	15,6	45,0	1,8	12,0	0,5
XL	55,0	21,7	73,0	71,0	585,0	23,0	445,0	17,5	1072,0	42,2	277,0	10,9	803,0	31,6	180,0	7,1	70,0	2,8	395,0	15,6	45,0	1,8	12,0	0,5
S LADY	41,0	16,1	75,0	70,5	540,0	21,3	445,0	17,5	1050,0	41,3	277,0	10,9	594,0	23,4	120,0	4,7	70,0	2,8	395,0	15,6	45,0	1,8	12,0	0,5

SIZING CHART

Height (cm)	144	146	148	150	152	154	157	159	161	163	165	168	170	172	174	176	178	180	182	184	186	188	190	192	194	196	198	200	202
Inseam (cm)	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96
S																													
M																													
L																													
XL																													
S LADY																													
Height (inch)	4'8"	4'10"	4'11"	4'11"	5'0"	5'1"	5'1"	5'2"	5'3"	5'4"	5'5"	5'6"	5'7"	5'7"	5'8"	5'9"	5'10"	5'11"	6'0"	6'0"	6'1"	6'2"	6'3"	6'4"	6'5"	6'5"	6'6"	6'7"	6'7"
Inseam (inch)	26 3/4	27 1/4	27 3/4	28	28 1/4	28 3/4	29 1/4	29 1/2	30	30 1/4	30 3/4	31	31 1/2	32	32 1/4	32 3/4	33	33 1/2	33 3/4	34 1/4	34 3/4	35	35 1/2	35 3/4	36 1/4	36 3/4	37	37 1/2	37 3/4

TO MEASURE INSEAM

You must be standing on a hard surface, in bare feet (or light cycling socks). Ideally, you will be wearing cycling shorts or long tights.

Place the feet so the medial ankle bones are approximately 5 cm apart. This can easily be gauged by slipping the width of the measuring tape case between the ankle bones.

The metric tape should be centered in the crotch. With the tape firmly in the crotch, pull with about the same pressure that you would feel if you were sitting on a bicycle seat. Pull the measuring tape to the floor for the inseam measurement.

TO MEASURE HEIGHT

You must be standing on a hard surface, in bare feet (or light cycling socks).

Place the feet so the medial ankle bones are approximately 5 cm apart. This can easily be gauged by slipping the width of the measuring tape case between the ankle bones.

DEVINCI