

06

<b>FV6270201</b>	Small
<b>FV6270301</b>	Medium
<b>FV6270401</b>	Large
<b>FV6270501</b>	XLarge



## SPECIFICATIONS


<b>Frame</b>	Optimum 61 touring and hybrid frame with disc brake mount
<b>Color</b>	Copper Orange
<b>Available Sizes</b>	s-m-l-xl
<b>Weight</b>	11.1 kg / 24.5 lb
<b>Fork</b>	Devinci Cromoly with disc brake hanger
<b>Rear Shock</b>	-
<b>Headset</b>	FSA I SS (No.16/CC)
<b>Rear Derailleur</b>	Shimano Deore XT M751
<b>Front Derailleur</b>	Shimano Tiagra 4403
<b>Crankset</b>	Truvativ Elita GXP 52/42/30T
<b>Chainguide</b>	-
<b>Shifters</b>	Shimano 105 5510
<b>Cassette</b>	Shimano HG70 9s 11-34T
<b>Chain</b>	Shimano HG73
<b>Bottom Bracket</b>	Truvativ GXP
<b>Pedals</b>	Shimano M520
<b>Front Hub</b>	Shimano M475 disc
<b>Rear Hub</b>	Shimano M475 disc
<b>Rims</b>	Mavic A319
<b>Spokes</b>	DT Swiss stainless
<b>Wheels</b>	-
<b>Tires</b>	Kenda Kwick Roller, CAP, reflective 700x28C
<b>Brakes</b>	Shimano R550
<b>Brake Levers</b>	Shimano 105 5510
<b>Stem</b>	V2 Pro 31.8mm
<b>Handlebar</b>	V2 Gyro roadbar 6061 butted 31.8mm
<b>Grips / Tape</b>	Cork with gel
<b>Saddle</b>	Selle Italia XO trans am leather
<b>Seat Post</b>	V2 Fusion carbon 27.2mm
<b>Seat Collar</b>	Devinci bolt integrated cable stop

## Notes

**DEVINCI**

## ➤ OPTIMUM 61 TOURING AND HYBRID FRAME

with disc brake mount

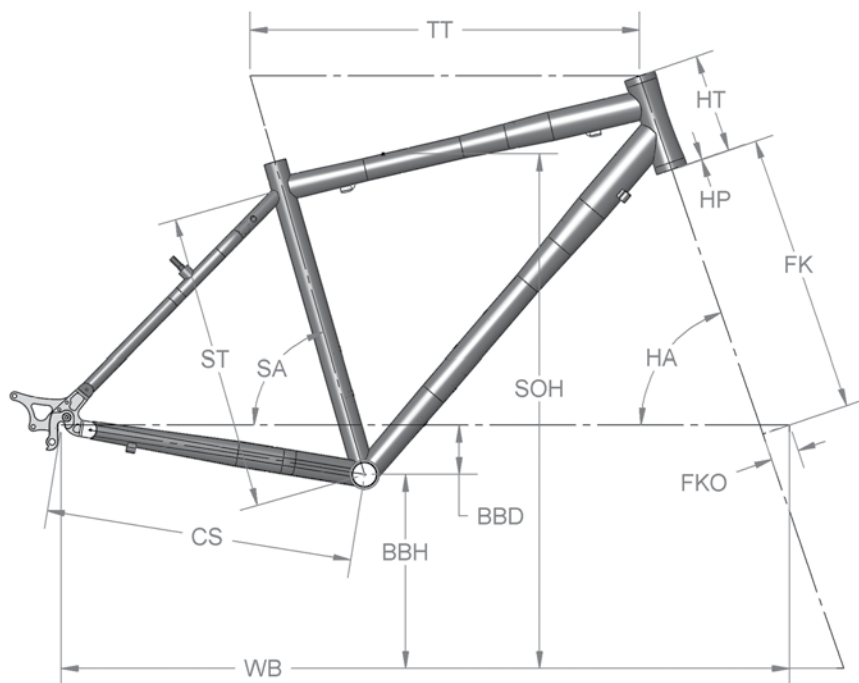

### FRAME TECHNICAL SPECIFICATIONS

Seat post diameter	27.2 mm
Seat collar diameter	31.8 mm
Headset diameter	1 1/8"
Headset type	Integrated
Fork type	Rigid
Brake type	"V-Brake" / Disk
Front derailleur diameter	31.8 mm
Front derailleur cable route	Bottom
Front derailleur type	Down-swing
Bottom bracket shell width	68 mm
Freehub width	135 mm
Shock length	-
Shock travel	-
Shock pivot width top	-
Shock pivot width bottom	-
Shock bolt diameter	-
Rear wheel travel	-
Tire maximum clearance	700 - 35
Rear derailleur hanger type	MFD205
Rear rack eyelet	Dropout - Seatstay
Fender eyelet	Yes
Weight	1.40 kg / 3.1 lb

### FRAME GEOMETRY

	ST		SA	HA	TT		CS		WB		BBH		SOH		HT		BBD		FK		FKO		HP	
	cm	in	deg	deg	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
<b>S</b>	37.0	14.6	75.0	70.5	540.0	21.3	435.0	17.1	1027.0	40.4	275.0	10.8	690.0	27.2	120.0	4.7	70.0	2.8	395.0	15.6	45.0	1.8	1.0	0.0
<b>M</b>	42.0	16.5	74.0	71.0	555.0	21.9	435.0	17.1	1027.0	40.4	275.0	10.8	729.0	28.7	140.0	5.5	70.0	2.8	395.0	15.6	45.0	1.8	1.0	0.0
<b>L</b>	47.0	18.5	73.5	71.0	565.0	22.2	435.0	17.1	1038.0	40.9	275.0	10.8	769.0	30.3	170.0	6.7	70.0	2.8	395.0	15.6	45.0	1.8	1.0	0.0
<b>XL</b>	51.0	20.1	73.0	71.0	585.0	23.0	435.0	17.1	1055.0	41.5	275.0	10.8	800.0	31.5	200.0	7.9	70.0	2.8	395.0	15.6	45.0	1.8	1.0	0.0

### SIZING CHART

Height (cm)	144	146	148	150	152	154	157	159	161	163	165	168	170	172	174	176	178	180	182	184	186	188	190	192	194	196	198	200	202
Inseam (cm)	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96
<b>S</b>																													
<b>M</b>																													
<b>L</b>																													
<b>XL</b>																													
Height (inch)	4'8"	4'10"	4'11"	4'11"	5'0"	5'1"	5'1"	5'2"	5'3"	5'4"	5'5"	5'6"	5'7"	5'7"	5'8"	5'9"	5'10"	5'11"	6'0"	6'0"	6'1"	6'2"	6'3"	6'4"	6'5"	6'5"	6'6"	6'7"	6'7"
Inseam (inch)	26 3/4	27 1/4	27 1/2	28	28 1/4	28 3/4	29 1/4	29 1/2	30	30 1/4	30 3/4	31	31 1/2	32	32 1/4	32 3/4	33	33 1/2	33 3/4	34 1/4	34 3/4	35	35 1/2	35 3/4	36 1/4	36 1/2	37	37 1/2	37 3/4

#### TO MEASURE INSEAM

You must be standing on a hard surface, in bare feet (or light cycling socks). Ideally, you will be wearing cycling shorts or long tights.

Place the feet so the medial ankle bones are approximately 5 cm apart. This can easily be gauged by slipping the width of the measuring tape case between the ankle bones.

The metric tape should be centered in the crotch. With the tape firmly in the crotch, pull with about the same pressure that you would feel if you were sitting on a bicycle seat. Pull the measuring tape to the floor for the inseam measurement.

#### TO MEASURE HEIGHT

You must be standing on a hard surface, in bare feet (or light cycling socks).

Place the feet so the medial ankle bones are approximately 5 cm apart. This can easily be gauged by slipping the width of the measuring tape case between the ankle bones.

**DEVINCI**