

06

FV6010201	Small
FV6010301	Medium
FV6010401	Large
FV6010501	XLarge




SPECIFICATIONS

Frame	Optimum 2 road frame
Color	Pearled White / Deep Blue
Available Sizes	s-m-l-xl
Weight	9.7 kg / 21.3 lb
Fork	Devinci Carbon As aluminum steerer
Rear Shock	-
Headset	TH Industries IS-3E
Rear Derailleur	Shimano Tiagra 4400
Front Derailleur	Shimano Sora 3304
Crankset	Truvativ Isoflow power spline 52/42/30T
Chainguide	-
Shifters	Shimano Sora 3303
Cassette	Shimano HG50 8s 13-26T
Chain	Shimano HG50
Bottom Bracket	Truvativ power spline
Pedals	Wellgo clipless
Front Hub	Ritchey
Rear Hub	Ritchey
Rims	Alex R450
Spokes	DT Swiss stainless
Wheels	-
Tires	Michelin Dynamic 700x23C
Brakes	Promax dual pivot
Brake Levers	Shimano Sora 3303
Stem	Ritchey 31.8mm
Handlebar	V2 Gyro roadbar 6061 butted 31.8mm
Grips / Tape	Cork with gel
Saddle	Selle Italia FK trans am
Seat Post	Ritchey 31.6mm
Seat Collar	Devinci bolt

Notes

DEVINCI

➤ OPTIMUM 2 ROAD FRAME

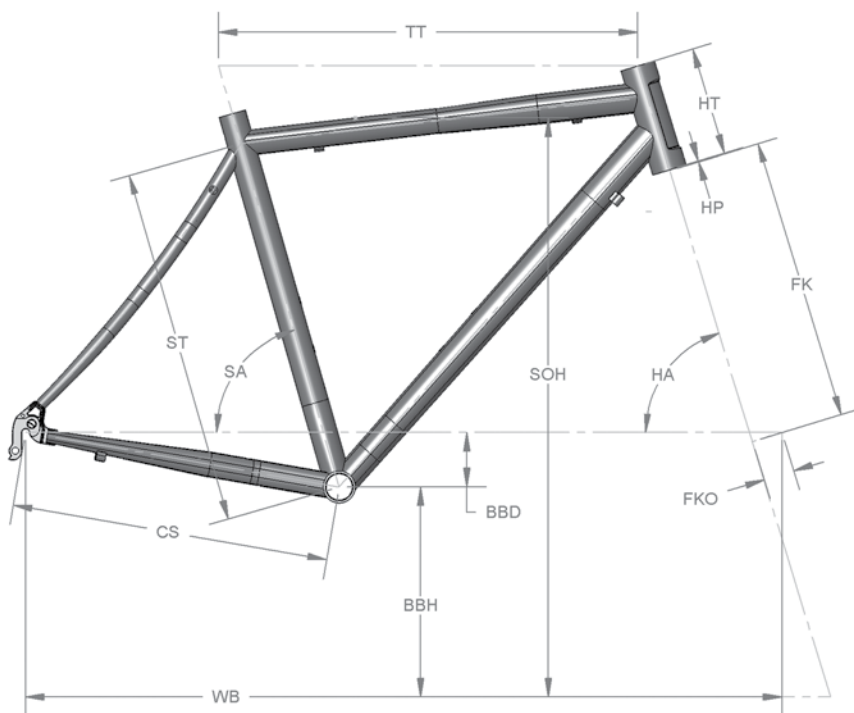

FRAME TECHNICAL SPECIFICATIONS

Seat post diameter	31,6 mm
Seat collar diameter	34,9 mm
Headset diameter	1 1/8"
Headset type	Integrated
Fork type	Rigid
Brake type	Caliper
Front derailleur diameter	34,9 mm
Front derailleur cable route	Bottom
Front derailleur type	Down-swing
Bottom bracket shell width	68 mm
Freehub width	130 mm
Shock length	NA
Shock travel	NA
Shock pivot width top	NA
Shock pivot width bottom	NA
Shock bolt diameter	NA
Rear wheel travel	NA
Tire maximum clearance	700 - 25
Rear derailleur hanger type	MFD205
Rear rack eyelet	Dropout-Seatstay
Fender eyelet	NA
Weight	1,22 kg / 2.68 lb

FRAME GEOMETRY

	ST		SA	HA	TT		CS		WB		BBH		SOH		HT		BBD		FK		FKO		HP	
	cm	in	deg	deg	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
S	38.0	15.0	75.0	72.0	520.0	20.5	410.0	16.1	970.0	38.2	270.0	10.6	688.0	27.1	120.0	4.7	70.0	2.8	365.0	14.4	40.0	1.6	1.0	0.0
M	43.0	16.9	74.0	73.0	540.0	21.3	410.0	16.1	974.0	38.3	270.0	10.6	744.0	29.3	140.0	5.5	70.0	2.8	365.0	14.4	40.0	1.6	1.0	0.0
L	48.0	18.9	73.5	73.0	560.0	22.0	410.0	16.1	990.0	39.0	270.0	10.6	765.0	30.1	170.0	6.7	70.0	2.8	365.0	14.4	40.0	1.6	1.0	0.0
XL	52.0	20.5	73.0	73.0	585.0	23.0	410.0	16.1	1009.0	39.7	270.0	10.6	799.0	31.5	200.0	7.9	70.0	2.8	365.0	14.4	40.0	1.6	1.0	0.0

SIZING CHART

Height (cm)	144	146	148	150	152	154	157	159	161	163	165	168	170	172	174	176	178	180	182	184	186	188	190	192	194	196	198	200	202
Inseam (cm)	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96
S																													
M																													
L																													
XL																													
Height (inch)	4'8"	4'10"	4'11"	4'11"	5'0"	5'1"	5'1"	5'2"	5'3"	5'4"	5'5"	5'6"	5'7"	5'7"	5'8"	5'9"	5'10"	5'11"	6'0"	6'0"	6'1"	6'2"	6'3"	6'4"	6'5"	6'5"	6'6"	6'7"	6'7"
Inseam (inch)	26 3/4	27 1/4	27 1/2	28	28 1/4	28 3/4	29 1/4	29 1/2	30	30 1/4	30 3/4	31	31 1/2	32	32 1/4	32 3/4	33	33 1/2	33 3/4	34 1/4	34 3/4	35	35 1/2	35 3/4	36 1/4	36 1/2	37	37 1/2	37 3/4

TO MESURE INSEAM

You must be standing on a hard surface, in bare feet (or light cycling socks). Ideally, you will be wearing cycling shorts or long tights.

Place the feet so the medial ankle bones are approximately 5 cm apart. This can easily be gauged by slipping the width of the measuring tape case between the ankle bones.

The metric tape should be centered in the crotch. With the tape firmly in the crotch, pull with about the same pressure that you would feel if you were sitting on a bicycle seat. Pull the measuring tape to the floor for the inseam measurement.

TO MESURE HEIGHT

You must be standing on a hard surface, in bare feet (or light cycling socks).

Place the feet so the medial ankle bones are approximately 5 cm apart. This can easily be gauged by slipping the width of the measuring tape case between the ankle bones.

DEVINCI